PRACTICE ZIGZAG STITCH ILLUSTRATED AS No. 3—Fig. 18. This zigzag stitch is used for appliqueing, joining lace, etc. Adjust your machine as follows.

1. Move zigzag stitch width regulator lever, (B) Fig. 17, to No. 2, and lock in position.
2. Turn stitch length regulator knob (F) to No. 4.
3. Your machine will now produce the zigzag stitch illustrated as No. 3 in Fig. 18.

PRACTICE ZIGZAG STITCH ILLUSTRATED AS No. 4—Fig. 18. This is a very narrow stitch which may be used for stitching arm hole seams or wherever an extra strong seam is desired. Adjust the machine as follows:

1. Move zigzag stitch width regulator lever, (B) Fig. 17, to No. ½ and lock in position.
2. Turn stitch length regulator knob (F) to No. 2.
3. The machine will now produce the zigzag stitch illustrated as No. 4 in Fig. 18.

PRACTICE ZIGZAG STITCH ILLUSTRATED AS No. 5—Fig. 18. This is a very tiny stitch used for fine rolled hems, dainty lace, appliqueing, top stitching bias seams, decorating baby clothes, etc. Adjust the machine as follows:

1. Move zigzag stitch width regulator lever, (B) Fig. 17, to No. 1 and lock in position.
2. Turn stitch length regulator knob (F) to No. 2.
3. The machine will now produce the zigzag stitch illustrated as No. 5 in Fig. 18.

SATIN STITCH

To automatically embroider a satin stitch, set the stitch width regulator lever (B) Fig. 17 at No. 5, and lock.

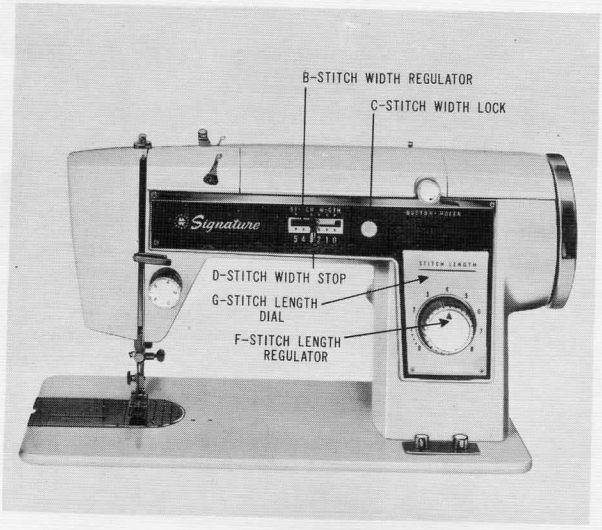

Fig. 17. Zigzag Control Levers

Set the stitch length regulator knob (F) to the right of No. 1 as far as possible, but still permitting the material to feed through the machine from front to back. This will produce a satin stitch which is the basis for all embroidery design. Test the stitching to make certain that the material is feeding properly to produce a good satin stitch as illustrated in Fig. 19 below.

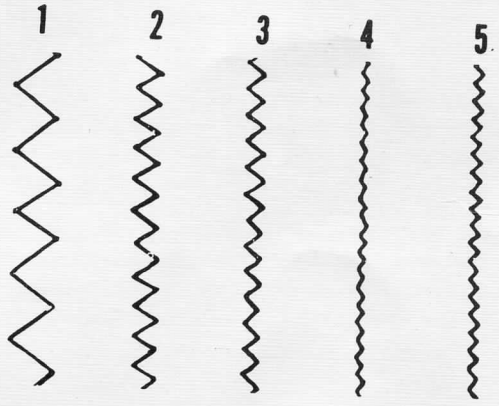

Fig. 18. Zigzag Stitches

Fig. 19. Satin Stitch